


Wildwood Bolt v1.0 – Quick Start Guide

1. Basic Configuration: To use Bolt as a standalone device, connect it to a standard 5V USB power adapter using the left USB-C connector and to amplified speakers using the audio jack.


Important: Be sure to use amplified speakers, or an amplifier, or a mixer with downstream amplifier because the LINE OUT jack is not designed to drive headphones or speakers directly.

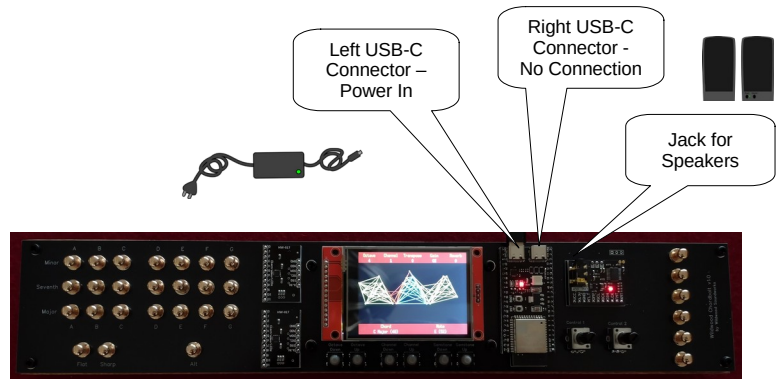

2. USB MIDI Device Configuration: To use Bolt as a USB MIDI controller (input device), connect it to a computer running MIDI or DAW software using the right USB-C connector.

You can also connect the audio jack jack to an amplifier or powered speakers if you want to hear the audio through both the computer running the MIDI or DAW software and Bolt.

In this configuration, Bolt gets its power from the right USB-C connector, so make sure nothing is plugged into the left USB-C connector.

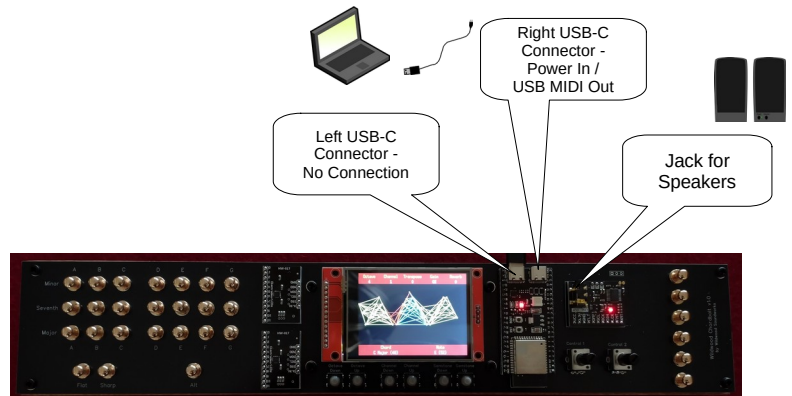

3. USB Host Configuration: To use Bolt with an external USB MIDI keyboard, flash drive or UAC1.0 audio device (headset, microphone, speakers or adapter):

- Connect a USB power source to the left USB-C connector.
- Connect a USB MIDI keyboard, flash drive or audio device to the right USB-C connector.
- Connect the audio jack to an amplifier or PC speakers.

In this configuration, Bolt gets its power from the left USB-C connector, and supplies power to the device plugged into the right USB-C connector.



Important:

1. Use a powered USB hub or a separate USB power adapter.
2. Do not plug two separate power sources into the left and right USB connectors at the same time.

Problems with setup? Contact support@wildwoodsoundworks.com for help.

Ready to create some music? Visit wildwoodsoundworks.com for more information.